

RESOLUTION

**AUTHORIZING THE USE OF A PORTION OF BEGINNING FUND BALANCE AS
AUTHORIZED BY COLORADO STATUTES**

WHEREAS, C.R.S. 22-44-105 states that a budget, duly adopted pursuant to this article, shall not provide for expenditures, interfund transfers, or reserves, in excess of available revenues and beginning fund balance.

WHEREAS, the Board of Education may authorize the use of a portion of the beginning fund balance in the budget, stating the amount to be used, the purpose for which the expenditure is needed, and the district's plan to ensure that the use of the beginning fund balance will not lead to an ongoing deficit.

WHEREAS, the Board of Education has determined the beginning fund balance is sufficient to allow for the one-time expenditure and the action will not lead to an ongoing deficit.

NOW, THEREFORE, BE IT RESOLVED:

In accordance with C.R.S. 22-44-105, the Board of Education authorizes the use of a portion of the FY2019 Beginning Fund Balance for the following fund: Capital Reserve Fund, for a total amount of \$25,400.00 to purchase a Kubota Diesel Tractor Model Number L2501.

BE IT FURTHER RESOLVED, the use of this portion of the beginning fund balance in the General Fund for the purpose set forth above will not lead to an ongoing deficit and will not need to be corrected in future years.



Board President Signature

1-21-19

Date of Adoption

Southwest Ag, Inc.
 39927 hwy 160
 Bavfield CO 81122
 tel: 970.884.4101 fax: 970-884-9228



Mancos School District Re-6
 Rick Irwin
 395 W Grand Avenue
 Mancos CO 81328
 (970) 759-1814
rirwin@mancosre6.edu

DESCRIPTION	
2017 Kubota L2501HST 4x4 Tractor	\$15,400
LA525 Loader/ 2 Lever QA / 72" Hi Cap Bucket	\$4,250
BH77 Kubota Backhoe w/ 12" Bucket	\$7,850
Sub Total	\$27,500
Kubota Cash Rebate	-\$500
Orange Rebate	-\$700
DSA	-\$900
	\$25,400



For Earth, For Life
Kubota

L

KUBOTA DIESEL TRACTOR L2501

With the power to tackle a wide range of jobs, Kubota's New L2501 combines robust performance and user-friendly features in one easy-to-operate compact tractor.



Powerful enough to tackle a wide range of tasks yet nimble enough to provide the precision you need

ENGINE




Powerful, clean running Kubota diesel engines

Kubota engines are well known for their reliability, power, and ability to generate outstanding horsepower. Today, Kubota engines are more fuel efficient and clean running than ever before. The 24.8 HP (18.5kW) engine in the L2501 meets the very latest EPA Tier 4 Final emission regulations. And, maintenance is easier with a gas-strut hood opener-assist.



COMFORT

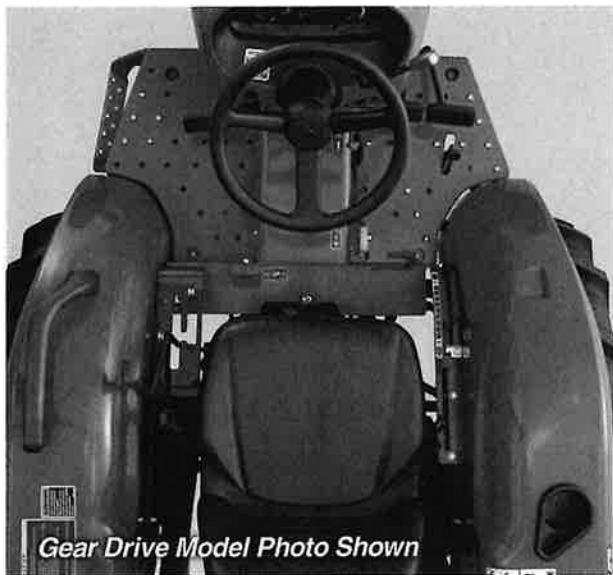

Enhanced operator's deck

The L2501 features a spacious operator's platform for optimal comfort. The ergonomic design means that the operator experiences less fatigue. The semi-flat design of the deck makes mounting and dismounting the tractor easier.

Select HST Transmission with 4WD or Gear Drive in 2WD or 4WD

The transmission delivers smooth operation with 4 main-shift speeds in two ranges (Hi/Lo) for a total of 8 forward and 4 reverse speeds. Choose either 2WD or 4WD to best suit your needs. The optional HST transmission offers simple forward and reverse change and 3-range shifting for optimal operating efficiency. Optional cruise control is also available on HST models.

of tasks, on performance you need.




VERSATILE APPLICATION

Performance Matched Implements

- LA525 Front Loader
Maximum lift capacity (pivot pin) is 1131 lbs, with a maximum lift height of 94.3".
- BH77 Backhoe
- Rear Rotary Cutter max. cutting width 60"
- Rear Snow Blower
- Rotary Tiller, Rear Blade, and more

2-lever-quick Coupler

The quick coupler is simple to use. Quick, easy on/off buckets and other attachments require no tools, only mounting pins and hose couplers, allowing you to move onto the next task in a matter of minutes.

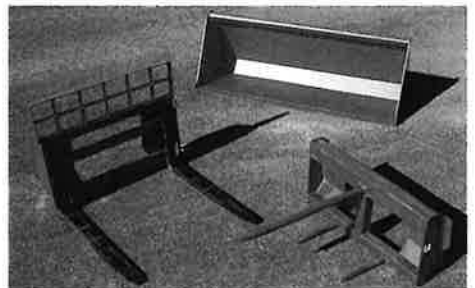

Specifications

Model			L2501		
			Gear-Drive Transmission		HST
			2WD	4WD	4WD
Engine			Direct injection, Vertical, Water-Cooled 4 cycle diesel		
Type					
Engine gross power*	HP (kW)		24.8 (18.5)		
Engine net power**	HP (kW)		23.9 (17.8)		
PTO power	HP (kW)		20.5 (15.3)		19.0 (14.2)
No. of cylinders			3		
Bore & stroke	in. (mm)		3.4 x 3.6 (87 x 92.4)		
Total displacement	cu. in. (cm ³)		100.47 (1647)		
Rated speed	rpm		2200		
Battery			12V, RC: 123 min, CCA: 490 A		
Alternator			12V, 40A		
Fuel tank capacity	US gal. (ℓ)		10.0 (38.0)		
PTO					
Rear PTO type			Transmission driven with overrunning clutch		Live-continuous running
PTO/Engine speed	rpm		540/1910		540/2105
Hydraulic					
Lift control type			Position control		
Pump capacity (main)	gpm (ℓ/min)		5.15 (19.5)		
(PS)	gpm (ℓ/min)		3.13 (11.8)		
3-point hitch			Category I		
Lift capacity at lift points	lbs. (kg)		1918 (870)		
24 in. behind lift points	lbs. (kg)		1389 (630)		
System pressure	PSI (MPa)		2205 (15.2)		
Travelling System					
Transmission			Gear shift, 8 forward and 4 reverse		Hydrostatic transmission, 3 range speed
Steering			Integral type power steering		
Brake			Wet disc type		
Clutch			Dry type single stage		
Tire size	AG Standard	Front/Rear	6-15/11.2-24		
	Indust. Option	Front/Rear	N/A		
			27 x 8.50 - 15/15 - 19.5 R4		
Traveling speed with standard AG tires		mph (km/h)			
			Forward 0.9 (1.4) - 10.7 (17.3)		Forward 0 (0.0) - 11.5 (18.5)
			Reverse 1.2 (1.9) - 3.9 (6.2)		Reverse 0 (0.0) - 10.3 (16.6)
Dimensions					
Overall length (w/o 3P)	in. (mm)		110.6 (2810)		106.3 (2700)
Overall width (min. tread)	in. (mm)		55.1 (1400)		
Overall height (w/Foldable ROPS)	in. (mm)		91.7 (2330)		
Wheelbase	in. (mm)		63.3 (1610)		
Min. ground clearance	in. (mm)		13.6 (345)		13.4 (340)
Tread					
Front tire	in. (mm)		41.3 (1050)		43.1 (1095)
Rear tire	in. (mm)		43.8 (1115) / 47.1 (1195) / 50.8 (1290)		
Min. turning radius (w/brake, 4WD disengaged)	feet (m)		7.9 (2.4)		8.2 (2.5)
Weight (with ROPS)	lbs. (kg)		2425 (1100)		2601 (1180)
			2623 (1190)		

* SAE J1995

** SAE J1349

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

©2015 Kubota Corporation

Kubota®

KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503
 Western Division: 1175 S. Guild Ave., Lodi, CA 95240 Tel (209) 334-9910
 Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900
 Northern Division: 6300 at One Kubota Way, Groveport, OH 43125 Tel (614) 835-1100
 Southeast Division: 1025 Northbrook Parkway, Suwanee, GA 30024 Tel (770) 995-8855

Visit our web site at: www.kubota.com

